

T1460

MECHANICAL DRIVE
CHAIN TRENCHER


TRENGOR

by ASTEC



BREAKTHROUGH SOLUTIONS

T1460 Mechanical Drive Chain Trencher

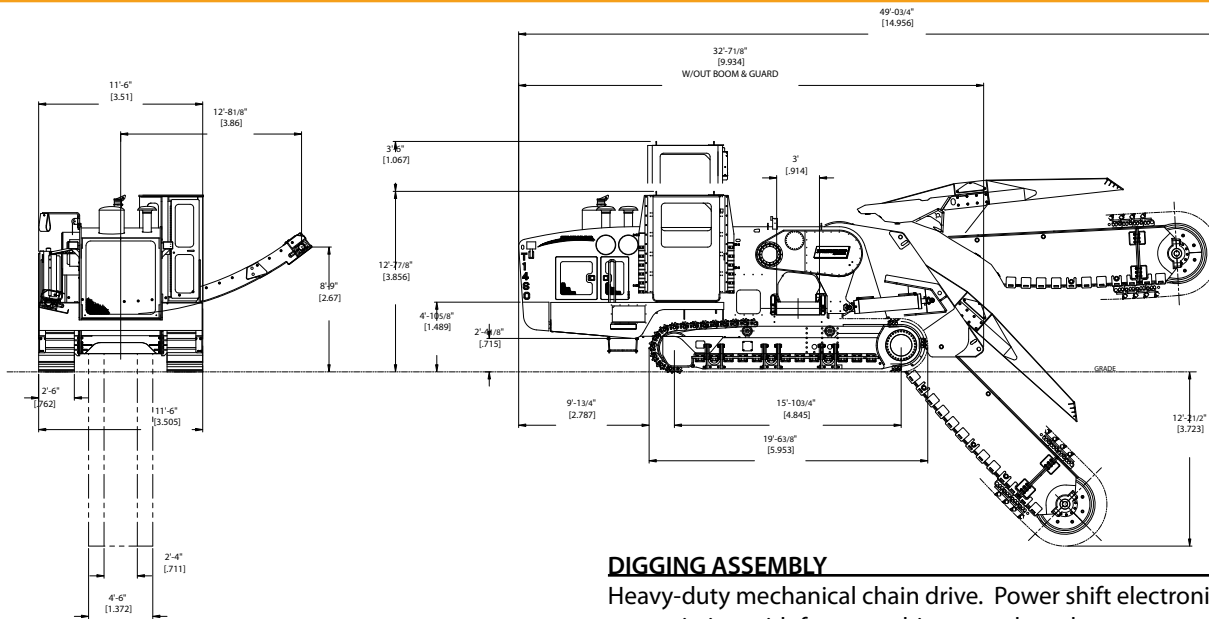

ENGINE

- Caterpillar® C18 Acert turbocharged diesel, Tier 3 Stage IIIA emissions
- 630 hp (470 Kw) @ 2100 RPM
- 2042 ft-lbs (2768 N-m) @ 2100 RPM
- Fuel rate consumption: 32 gal. (121 L)/hour at full horsepower
- 24-volt DC electrical system
- Cooling system — up to 125 F ambient (52 C)
- Heavy-duty 2-stage air cleaner
- Muffler
- Tachometer

FUEL CAPACITY

Dual tanks 350 gal. (1324 L)
 Operation 11 hours at full horsepower

HYDRAULIC SYSTEM

Capacity 240 gal. (908 L)
 Crawler drive Closed loop piston pumps
 Conveyor drive Closed loop piston pumps
 Accessory Open loop

TRACK DRIVE

Infinitely variable hydrostatic/mechanical
 Speed 2 mph (3.2 kph)
 Track control Independent proportional electric over hydraulic
 Load control Microcontroller with bypass
 Crawlers Cat D-7 components
 Grouser 30-inch (762 mm) wide, low-profile double grousers

OPERATOR STATION

Fully enclosed, air conditioned, heated, and pressurized cab
 Elevation 44 in. (1067 mm)

DIGGING ASSEMBLY

Heavy-duty mechanical chain drive. Power shift electronic controlled transmission with four trenching speeds and reverse.

Tailwheel: 48-in. (1219 mm) diameter **forged** (not welded plate) ring

Trench depth

..... 6-, 8-, 10-, & 12-ft (1829-, 2439, 3050-, & 3658-mm) primaries

..... 2-, 4-, 6-, & 8-ft (610-, 1219-, 1829-, & 2438-mm) extensions

Trench width

Double D-7 on 10-in (254 mm) centers 24 to 36 in (660 to 915 mm)

Double D-7 on 16-in (406 mm) centers 32 to 42 in (813 to 1067 mm)

Double D-7 on 20-in (508 mm) centers 36 to 46 in (914 to 1168 mm)

Double D-8 on 12-in (305 mm) centers 28 to 38 in (711 to 965 mm)

Double D-8 on 16-in (406 mm) centers 32 to 42 in (813 to 1067 mm)

Double D-8 on 20-in (508 mm) centers 36 to 46 in (914 to 1168 mm)

Double D-8 on 24-in (610 mm) centers 40 to 54 in (1016 to 1372 mm)

Triple D-8 on 16-in (406 mm) centers 48 to 54 in (1220 to 1372 mm)

CONVEYOR

Arc type conveyor with hydraulic shift

Belt width 36 in. (914 mm)

Belt speed 0 to 800 fpm (244 mpm)

ADDITIONAL STANDARD ITEMS

- Bottom tail wheel transition wear plates
- Personnel guard
- Noise abatement equipment
- Work lights (2 fore/2 aft)

OPTIONAL EQUIPMENT

- Automatic laser control for grade
- Automatic laser control for steering
- Hydraulic fold up crumb shoe
- Auxiliary truck loading conveyor
- Roadminer attachment
- Berm scrapers
- Tail wheel weights
- Manual lube kit
- Cold weather package
- CE Package

APPROXIMATE WEIGHT AND DIMENSIONS

Weight 160,000 - 185,000 lbs. (72,727 - 84,090 kg)

Width 11 ft. 6 in. (3.51 m)

Height 12 ft. 5 in. (3.78 m)

Length [with 12 ft (3.6 m) boom] 49 ft. .75 in. (14.95 m)

IMPORTANT: Astec Underground reserves the right to change these specifications without notice and without incurring any obligation relating to such change. This literature has been published for world-wide circulation. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your Astec dealer/distributor will be able to give you details of the products and their specifications available in your area.

NOTE: All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.

© 2007 ASTEC UNDERGROUND. All Rights Reserved. TREN_T1460_5_08

ASTEC UNDERGROUND an Astec Industries Company

9600 CORPORATE PARK DR • LOUDON, TN 37774 USA • 800.527.6020 FAX 865.458.8575 • astecunderground.com

